
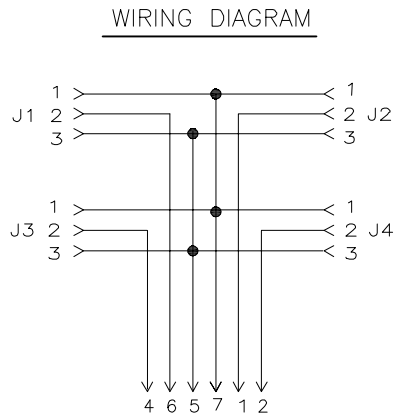


SPECIFICATIONS	
MATING PLUG CABLE	CKRM 12-6-*
HOUSING MATERIAL	ALUMINUM ALLOY
HOUSING FINISH/COLOR	EPOXY/BLACK
CONTACT CARRIER MATERIAL	TPU
CONTACT MATERIAL/PLATING	BRASS/GOLD
OPERATING VOLTAGE	250 VAC/ 300 VDC
OPERATING CURRENT	4.0 A PER PORT, 7.0 A TOTAL
PROTECTION CLASS to DIN 40050	IP 67, ONLY WHEN ALL RECEPTACLES ARE COVERED WITH PLUGS OR CONNECTED
OPERATING TEMPERATURE	-30°C to 80°C (-22°F to 176°F)

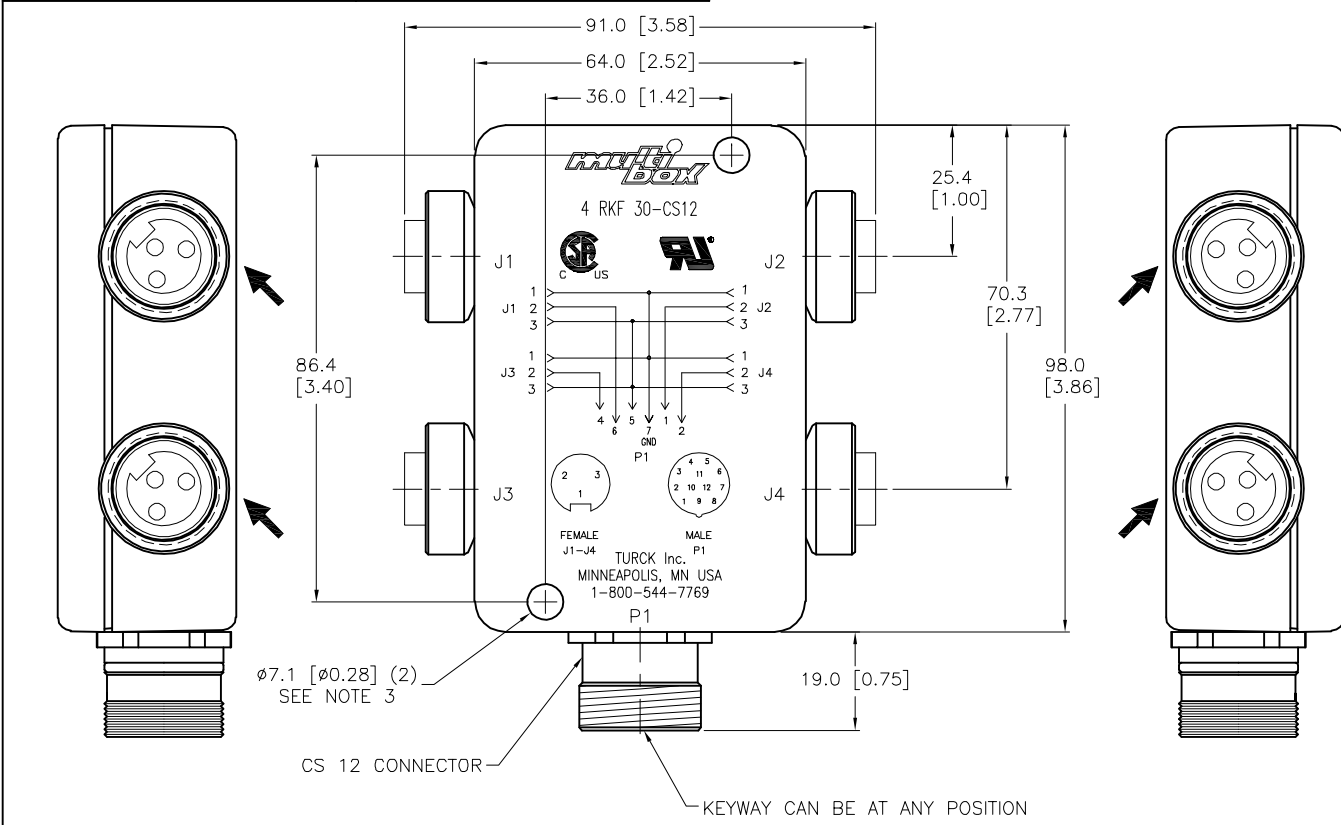

SOURCE DRAWING - FOR REFERENCE ONLY

- NOTES:
- USE MATING CORDSET CKRM 12-6-*. (* = CABLE LENGTH IN METERS)
 - BOX HEIGHT IS 34.5mm NOMINAL.
 - CLEARANCE HOLE FOR 1/4-20 MOUNTING SCREWS (NOT INCLUDED).

RELATED DOCUMENTS		3RD ANGLE PROJECTION	THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us	
1.			DRFT	CBM	DATE	11/04/98
2.		ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY	APVD	JAL	SCALE	1=1.5
3.			CONTACT TURCK FOR MORE INFORMATION	UNIT OF MEASUREMENT		IDENTIFICATION NO.
4.		MILLIMETER [INCH]		U2361-2		
MATERIAL	SEE SPECIFICATIONS	DO NOT SCALE THIS DRAWING		FILE: U2361-2		REV J
FINISH	SEE SPECIFICATIONS					SHEET 1 OF 1

J	UPDATED HOLE LENGTH TO 36.0	ER	09/03/21	77012
REV	DESCRIPTION	BY	DATE	ECO NO.