
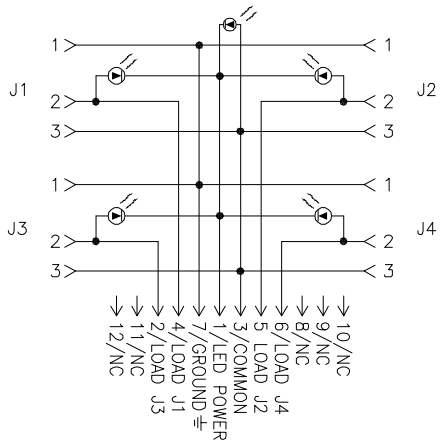


SPECIFICATIONS	
MATING PLUG CABLE	CKBM 12-7-* OR CKM 12-0 (SEE NOTE 1)
HOUSING MATERIAL	ALUMINUM ALLOY
HOUSING FINISH/COLOR	EPOXY/BLACK
CONTACT CARRIERS	TPU
CONTACT MATERIAL/PLATING	BRASS/GOLD
DISCONNECTS MATERIAL/PLATING	BRASS/NICKEL
OPERATING VOLTAGE	24 VAC-120 VAC
OPERATING CURRENT	4.0 A PER PORT, 7.0 A TOTAL
PROTECTION CLASS to DIN 40050	IP 67 ONLY WHEN CKB-12 CORDSET AND ALL RECEPTACLES ARE COVERED WITH PLUGS OR CONNECTED
OPERATING TEMPERATURE	-30°C to 8°C (-22°F to 176°F)

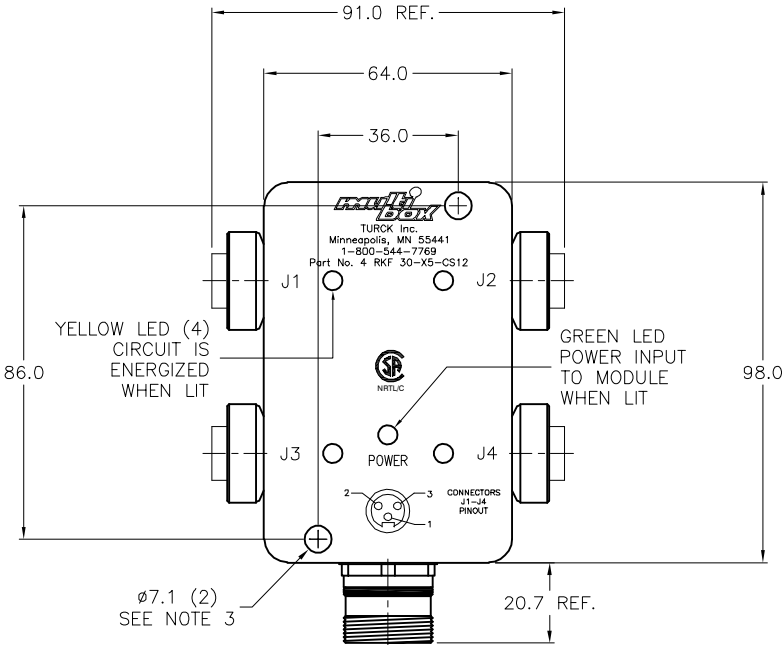

ELECTRICAL CIRCUIT DIAGRAM

- NOTES:
- USE MATING CORDSET CKBM 12-7-*. (* = CABLE LENGTH IN METERS)
 - BOX HEIGHT IS 36.0mm NOMINAL.
 - CLEARANCE HOLE FOR 1/4-20 MOUNTING SCREWS (NOT INCLUDED).
 - AT 24 VAC, THE LED'S MAY NOT BE AS BRIGHT AS NORMAL.

RELATED DOCUMENTS		3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		 3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us	
1. 2. 3. 4.				DRFT IK	DATE 04/11/00	DESCRIPTION	
MATERIAL		ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY		APVD	SCALE 1=2.0	4 RKF 30-X5-CS12	
FINISH		CONTACT TURCK FOR MORE INFORMATION		UNIT OF MEASUREMENT		IDENTIFICATION NO.	
				MILLIMETERS		U2361-01	
D UPDATE DIMENSIONS		NF	09/03/21	500000003484		REV	
REV DESCRIPTION		BY	DATE	ECO NO.		D	
DO NOT SCALE THIS DRAWING						FILE: U2361-01	
						SHEET 1 OF 1	