


SPECIFICATIONS	
MATERIAL	
HOUSING/COLOR	NYLON/BLACK
RECEPTACLES	BRASS/NICKEL
CONTACT CARRIERS/COLOR	NYLON/BLACK
CONTACTS	BRASS/GOLD
SEALING RING	VITON O-RINGS
ELECTRICAL DATA	
OPERATING VOLTAGE [V]	10-48 VDC
OPERATING CURRENT [A]	4.0 AMPS PER PORT
TOTAL CURRENT [A]	2.0 AMPS USING SINGLE POWER PAIR 4.0 AMPS USING DUAL POWER PAIR
MECHANICAL DATA	
PROTECTION CLASS	IP 67 - ONLY WHEN ALL RECEPTACLES ARE COVERED WITH PLUGS OR CONNECTED
OPERATING TEMPERATURE	-30°C to +80°C (-25°F to +176°F)

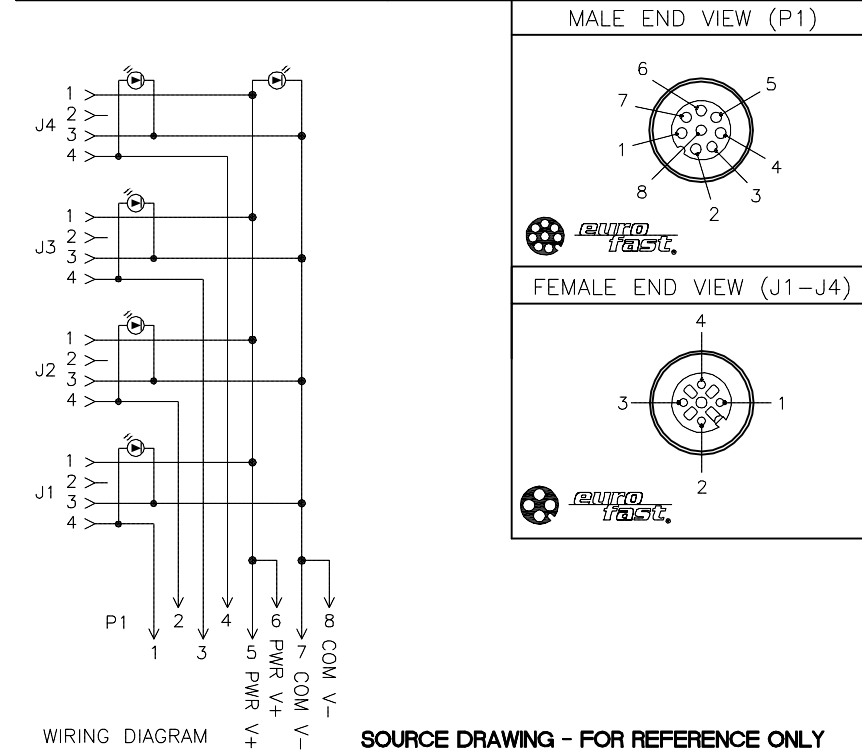

RELATED DOCUMENTS 1. 2. 3. 4.	3RD ANGLE PROJECTION 	THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.	TURCK IAC High Technology Sensors and Automation Controls 3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax turck.com
	MATERIAL SEE SPECIFICATIONS	DRFT JBJ DATE 01/27/02 APVD SCALE 1=1.3	DESCRIPTION 4MBM12-4P2-FS8
FINISH SEE SPECIFICATIONS	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY CONTACT TURCK FOR MORE INFORMATION	UNIT OF MEASUREMENT MILLIMETER [INCH]	IDENTIFICATION NO. U0877-10 REV G
G UPDATED CLOSURE CAPS TV 09/14/15 48811 REV DESCRIPTION BY DATE ECO NO.	DO NOT SCALE THIS DRAWING	FILE: U0877-10	SHEET 1 OF 1