
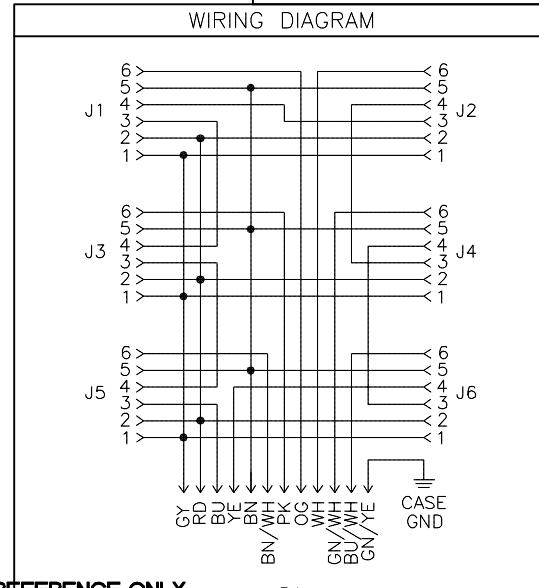


SPECIFICATIONS	
HOUSING MATERIAL	ALUMINUM ALLOY
HOUSING FINISH/COLOR	POWDER COAT/BLACK
RECEPTACLE HOUSING	NICKEL-PLATED BRASS
CONTACT CARRIERS/COLOR	TPU BLACK
CONTACTS	GOLD-PLATED BRASS
CABLE	OIL RESISTANT YELLOW PVC JACKET, 300V 105°C
OPERATING VOLTAGE	250 VAC/300 VDC
OPERATING CURRENT	4.0 A PER PORT, 9.0 A TOTAL
PROTECTION CLASS to DIN 40050	IP 67 - ONLY WHEN ALL RECEPTACLES ARE COVERED WITH PLUGS OR CONNECTED
OPERATING TEMPERATURE	-40°C to +90°C (-40°F to +194°F)



SOURCE DRAWING - FOR REFERENCE ONLY

NOTES:
 1. "CS10067" DESIGNATES SPECIAL WIRING PER CUSTOMER REQUEST.

RELATED DOCUMENTS 1. 2. 3. 4.	3RD ANGLE PROJECTION 	THIS DOCUMENT IS PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax turck.com	
	MATERIAL SEE SPECIFICATIONS	DRFT APVD	JBJ SCALE 1=2	DATE 04/14/00	DESCRIPTION 6 RKF 60-6M/CS10067
FINISH SEE SPECIFICATIONS	CONTACT TURCK FOR MORE INFORMATION	UNIT OF MEASUREMENT MILLIMETER [INCH]		IDENTIFICATION NO. U2366-3	REV E
E UPDATE CABLE OD		NF	08/23/16	40654	DO NOT SCALE THIS DRAWING
REV	DESCRIPTION	BY	DATE	ECO NO.	FILE: U2366-3