


SPECIFICATIONS	
MATING PLUG CABLE	CKM 19-17-*/S867
HOUSING MATERIAL	ALUMINUM ALLOY
HOUSING FINISH/COLOR	POWDER COATED/BLACK
CONTACT CARRIERS	TPU
CONTACTS	GOLD-PLATED BRASS
OPERATING VOLTAGE	150 V
OPERATING CURRENT	2.0 A
PROTECTION CLASS to DIN 40050	IP67 - ONLY WHEN ALL RECEPTACLES ARE COVERED WITH PLUGS OR CONNECTED
OPERATING TEMPERATURE	-40°C to 105°C (-40°F to 221°F)

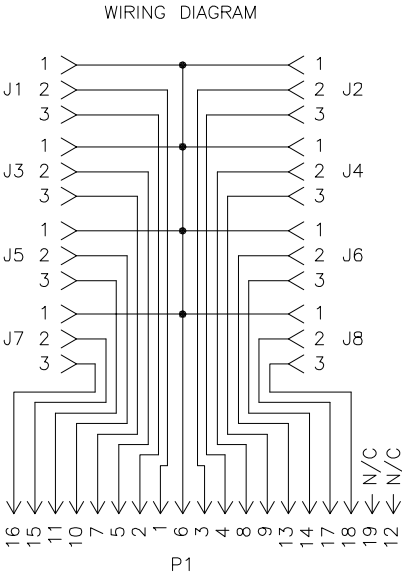

- NOTES
- USE MATING CORDSET CKM 19-17-*/S867.
 - BOX HEIGHT = 1.36 [34.5] NOMINAL.
 - CLEARANCE HOLE FOR 1/4-20 MOUNTING SCREWS (NOT INCLUDED).
 - */S868 DESIGNATES SPECIAL PIN-OUT PER CUSTOMER REQUIREMENT.
 - PACKAGING TO INCLUDE EIGHT (8) DUST COVERS (P/N 10130106).

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS					3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us	
MATERIAL					DRFT CBM		DATE 6/26/98		DESCRIPTION	
FINISH					APVD		SCALE NTS		8 RKF 30-CS19/S868	
CONTACT TURCK FOR MORE INFORMATION					UNIT OF MEASUREMENT		IDENTIFICATION NO.		REV	
					INCH [MILLIMETER]		U2911		H	
DO NOT SCALE THIS DRAWING					FILE: U2911		SHEET 1 OF 1			