


# FCS-GL1/2A2-NA-H1141/A


## Flow Monitoring – Immersion Sensor without Integrated Processor

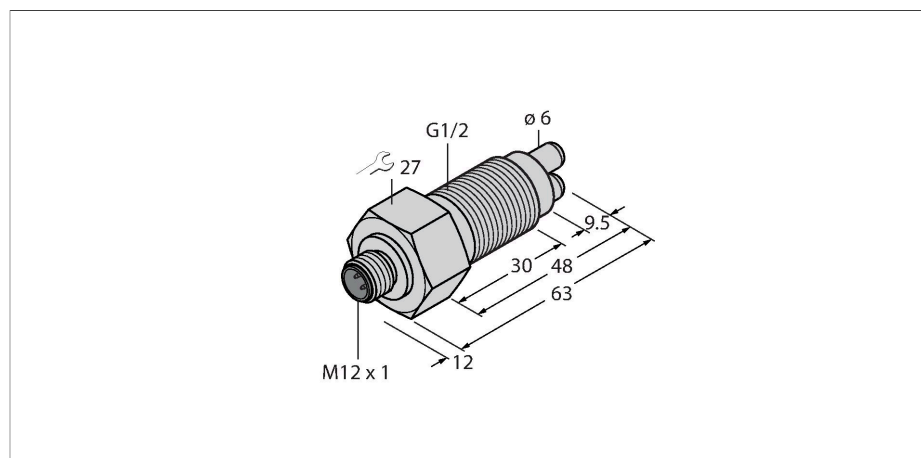

### Features

- Sensor for gaseous media
- Calorimetric functionality
- Adjustment via signal processor
- Status indicated via LED chain on signal processor
- Connector device, M12 × 1
- 4-wire connection to the processor

### Wiring diagram

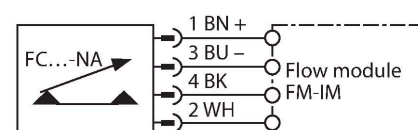

### Technical data

ID no.	6870404
Type	FCS-GL1/2A2-NA-H1141/A
<b>Mounting</b>	<b>Immersion sensor</b>
Air Operating Range	0.5...30 m/s
Stand-by time	10...90 s
Switch-on time	2...30 s
Switch-off time	5...30 s
Temperature jump, response time	max. 60 s
Temperature gradient	≤ 20 K/min
Medium temperature	-20...+80 °C
Protection class	IP67
MTTF	547 years acc. to SN 29500 (Ed. 99) 40 °C
MTBF	547 acc. to SN 29500 (Ed. 99) 40 °C
Design	Immersion
<b>Housing material</b>	<b>Stainless steel, 1.4305 (AISI 303)</b>
Sensor material	Stainless steel, 1.4305 (AISI 303)
Max. tightening torque of housing nut	30 Nm
Electrical connection	Connector, M12 × 1
Process Pressure	30 bar
Process connection	G 1/2" long version

### Functional principle

Our insertion - flow sensors operate on the principle of thermodynamics. The measuring probe is heated by several °C as against the flow medium. When fluid moves along the probe, the heat generated in the probe is dissipated. The resulting temperature is measured and compared to the medium temperature. The flow status of every medium can be derived from the evaluated temperature difference. Thus TURCK's wear-free flow sensors reliably monitor the flow of gaseous and liquid media.