



SPECIFICATIONS	
CABLE DATA	
MATING CORDSET	CKM 19-11-* or CKM19-11-*/S90
MATERIAL	
HOUSING MATERIAL/COLOR	NYLON/YELLOW
RECEPTACLE HOUSING MAT'L/PLATING	BRASS/NICKEL
CONTACT CARRIER MATERIAL/COLOR	NYLON OR TPU/BLACK
CONTACT MATERIAL/PLATING	BRASS/GOLD
SEALING O-RING MATERIAL	VITON O-RING
ELECTRICAL DATA	
OPERATING VOLTAGE	10-48 VDC
MAXIMUM CURRENT	4.0 AMPS PER PORT, 9.0 AMPS TOTAL
SPACINGS	to VDE 0110 GROUP C
MECHANICAL DATA	
PROTECTION CLASS to DIN 40050	IP 67 - ONLY WHEN ALL RECEPTACLES ARE COVERED WITH PLUGS OR CONNECTED
OPERATING TEMPERATURE	-30°C to +80°C (-22°F to +176°F)

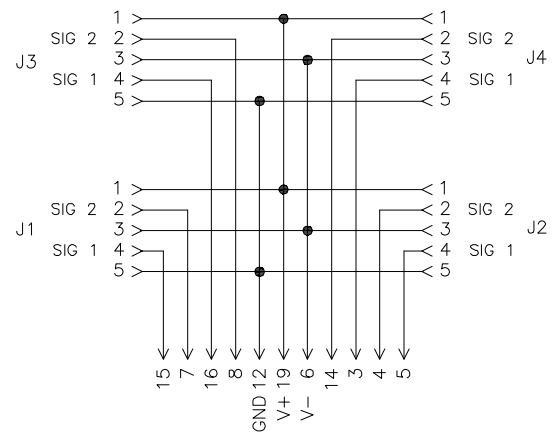


WIRING DIAGRAM

SOURCE DRAWING - FOR REFERENCE ONLY

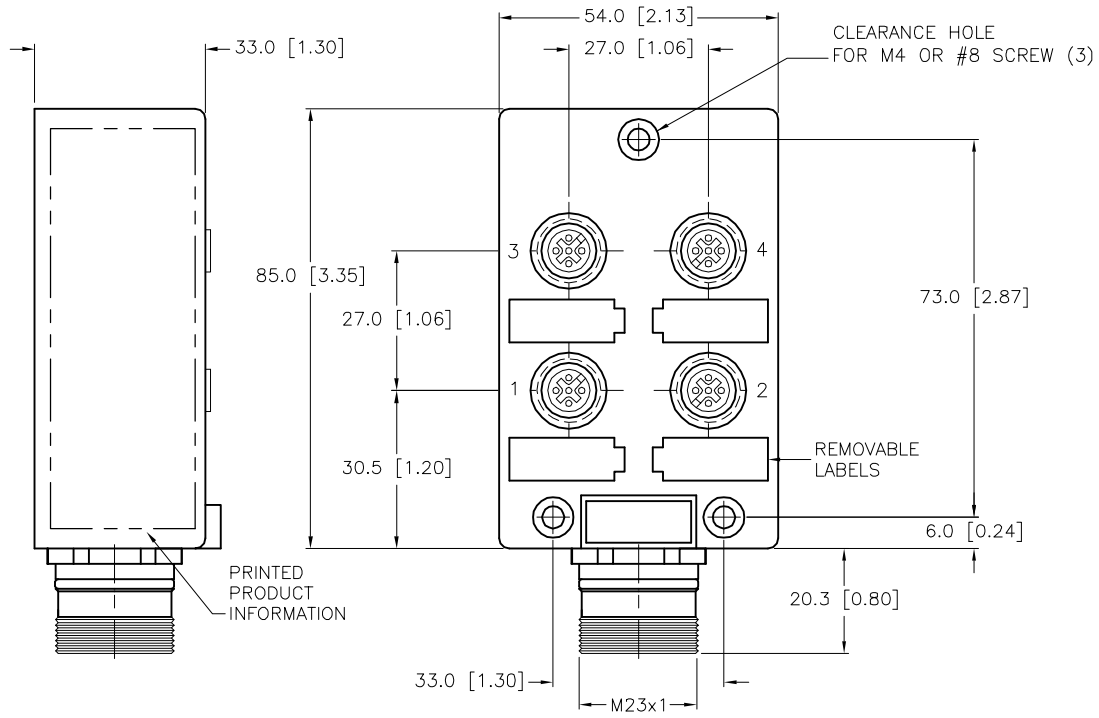

CLOSURE CAPS
2 (INCLUDED)



RELATED DOCUMENTS		3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us	
1.			DRFT	RJP	DATE	DESCRIPTION	
2.			APVD		07/05/96	VB 40.5-CS19	
3.		ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY CONTACT TURCK FOR MORE INFORMATION	UNIT OF MEASUREMENT		IDENTIFICATION NO.		REV
4.			MILLIMETER [INCH]		U7016-1		E
MATERIAL		SEE SPECIFICATIONS		DO NOT SCALE THIS DRAWING		FILE: U7016-1	
FINISH		SEE SPECIFICATIONS				SHEET 1 OF 1	

E	UPDATED CLOSURE CAPS	TV	09/15/15	48811
REV	DESCRIPTION	BY	DATE	ECO NO.