



SPECIFICATIONS

CABLE DATA	
MATING CORDSET	CK 16-0 or CKN 16-16-*
MATERIAL	
HOUSING/COLOR	NYLON/BLUE
CONTACT CARRIERS/COLOR	TPU/BLACK
RECEPTACLE HOUSINGS	NICKEL PLATED BRASS
CONTACTS	GOLD PLATED COPPER ALLOY
SEALING RING	VITON O-RING
CONNECTOR HOUSING	NICKEL PLATED BRASS
ELECTRICAL DATA	
MAXIMUM VOLTAGE	100 VDC
MAXIMUM CURRENT	4 AMPS PER PORT, 8 AMPS TOTAL
SPACINGS	VDE 0110 GROUP C
MECHANICAL DATA	
PROTECTION CLASS to DIN 40050	IP 67 ONLY WHEN ALL RECEPTACLES ARE COVERED WITH PLUGS OR CONNECTED
OPERATING TEMPERATURE	-40°C to 90°C (-40°F to 194°F)

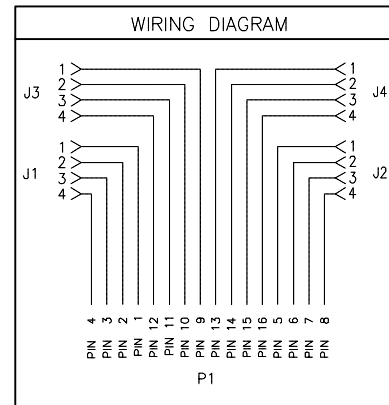

CONNECTOR PIN-OUT J1-J4

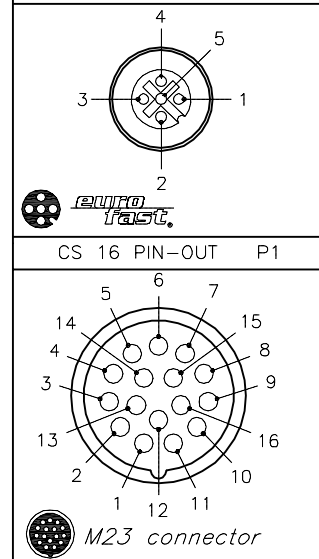

RELATED DOCUMENTS 1. 8-RDV-108 2. 3. 4.	3RD ANGLE PROJECTION 	THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		TURCK INC <i>High Technology Sensors and Automation Controls</i> 3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax turck.com	
		MATERIAL	DRFT DF APVD DF	DATE 01/27/99 SCALE 1=1.5	DESCRIPTION VB 4X1.5N-CS16
FINISH	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY CONTACT TURCK FOR MORE INFORMATION	UNIT OF MEASUREMENT MILLIMETER [INCH]		IDENTIFICATION NO. U0173-40	REV D
DO NOT SCALE THIS DRAWING		FILE: U0173-40		SHEET 1 OF 1	

D	UPDATED CLOSURE CAP	TV	09/14/15	48811
REV	DESCRIPTION	BY	DATE	ECO NO.