



SPECIFICATIONS	
HOUSING/COLOR	NYLON/YELLOW
RECEPTACLE	NICKEL-PLATED BRASS
CONTACT CARRIERS/COLOR	NYLON/BLACK (J1-J8), TPU/YELLOW (P1)
CONTACTS	GOLD-PLATED BRASS
SEALING RING	VITON O-RING
OPERATING VOLTAGE	10-48 VDC
OPERATING CURRENT	4.0 AMPS PER PORT, 7.0 AMPS TOTAL
SPACINGS	to VDE 0110 GROUP C (EUROFAST)
PROTECTION CLASS to DIN 40050	IP 67 - ONLY WHEN ALL RECEPTACLES ARE COVERED WITH PLUGS OR CONNECTED
OPERATING TEMPERATURE	-30°C to +80°C (-25°F to +176°F)

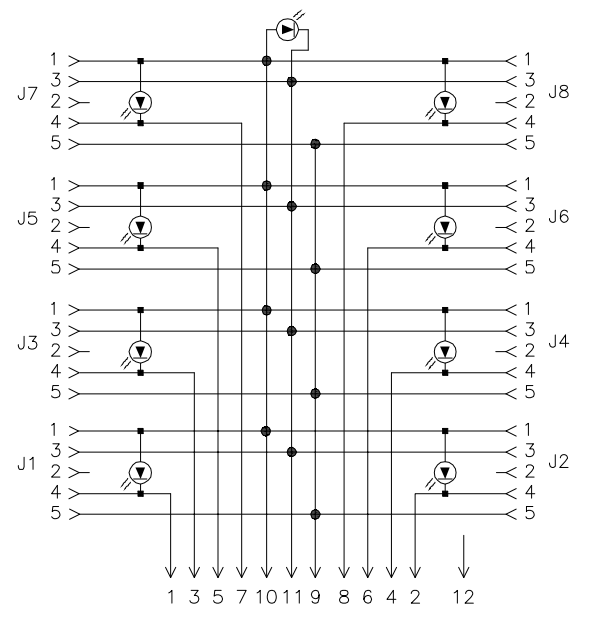

P1
WIRING DIAGRAM

SOURCE DRAWING - FOR REFERENCE ONLY

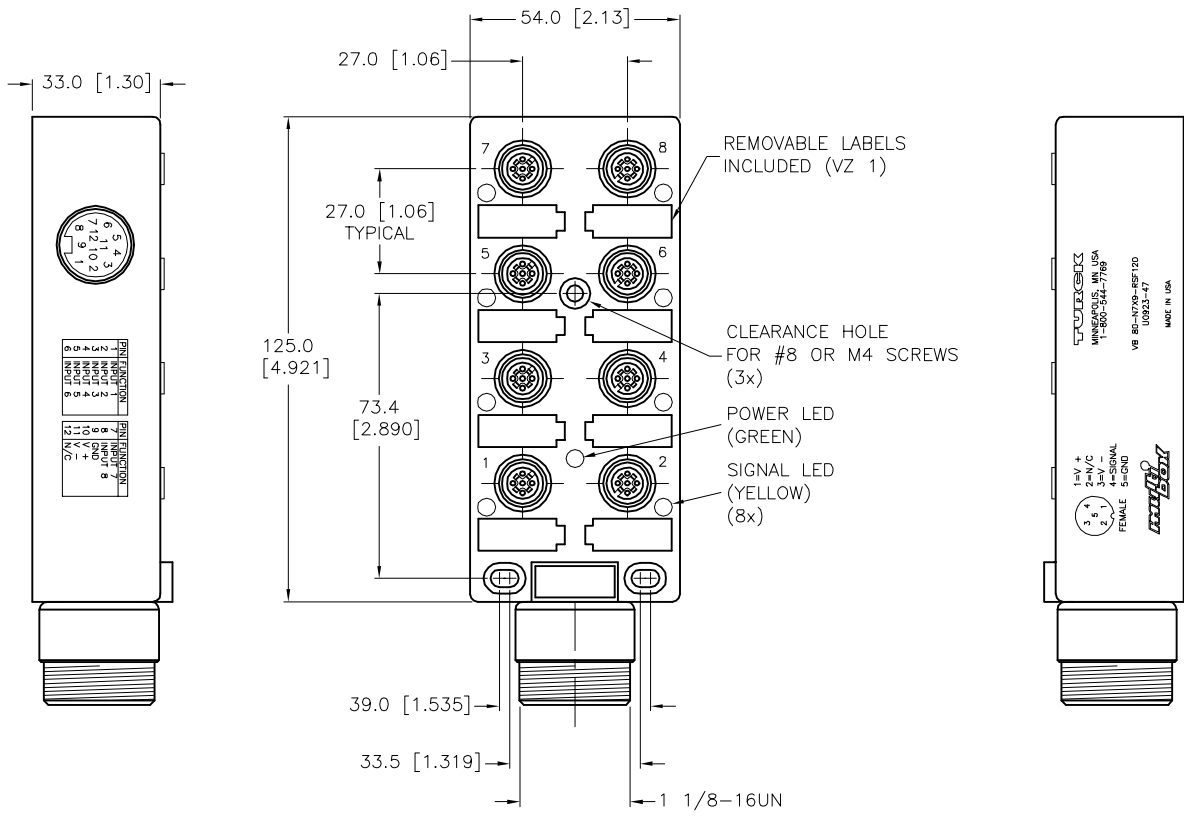

CLOSURE CAPS
(INCLUDED)

RELATED DOCUMENTS 1. 2. 3. 4.	3RD ANGLE PROJECTION	THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.	3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us	
	MATERIAL SEE SPECIFICATION		DRFT TH APVD	DATE 07/19/05 SCALE 1=2.0
FINISH SEE SPECIFICATION	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY	UNIT OF MEASUREMENT MILLIMETER [INCH]	IDENTIFICATION NO. U0923-47	REV E
E REV	UPDATED CLOSURE CAPS DESCRIPTION	TV BY	09/14/15 DATE	48811 ECO NO.
DO NOT SCALE THIS DRAWING		FILE: U0923-47		SHEET 1 OF 1