



SPECIFICATIONS	
CABLE DATA	
MATING PLUG CABLE	CK 12-11-*, SEE NOTE 1
MATERIAL	
HOUSING MATERIAL/COLOR	NYLON/YELLOW
CONTACT CARRIER MATERIAL/COLOR	NYLON/BLACK (J1-J8), TPU/YELLOW (P1)
CONTACT MATERIAL/PLATING	BRASS/GOLD(J1-J8)
DISCONNECT MATERIAL/PLATING	BRASS/NICKEL (P1)
ELECTRICAL DATA	
OPERATING VOLTAGE	10-48 VDC
LED FUNCTION	FOR PNP SENSOR OUTPUT
MAXIMUM CURRENT	4 AMPS PER PORT, 5 AMPS TOTAL
MECHANICAL DATA	
PROTECTION CLASS TO DIN 40050	IP 67 - ONLY WITH CK-12 CORDSET AND ALL RECEPTACLES ARE COVERED WITH PLUGS OR CONNECTED
OPERATION TEMPERATURE RANGE	-30°C to +90°C (-25°F to +194°F)

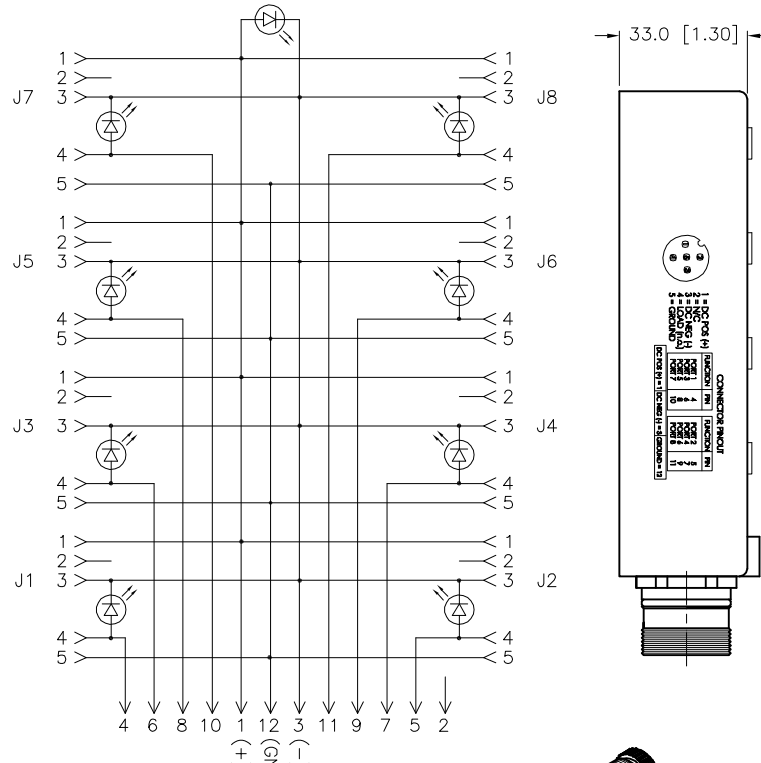

WIRING DIAGRAM

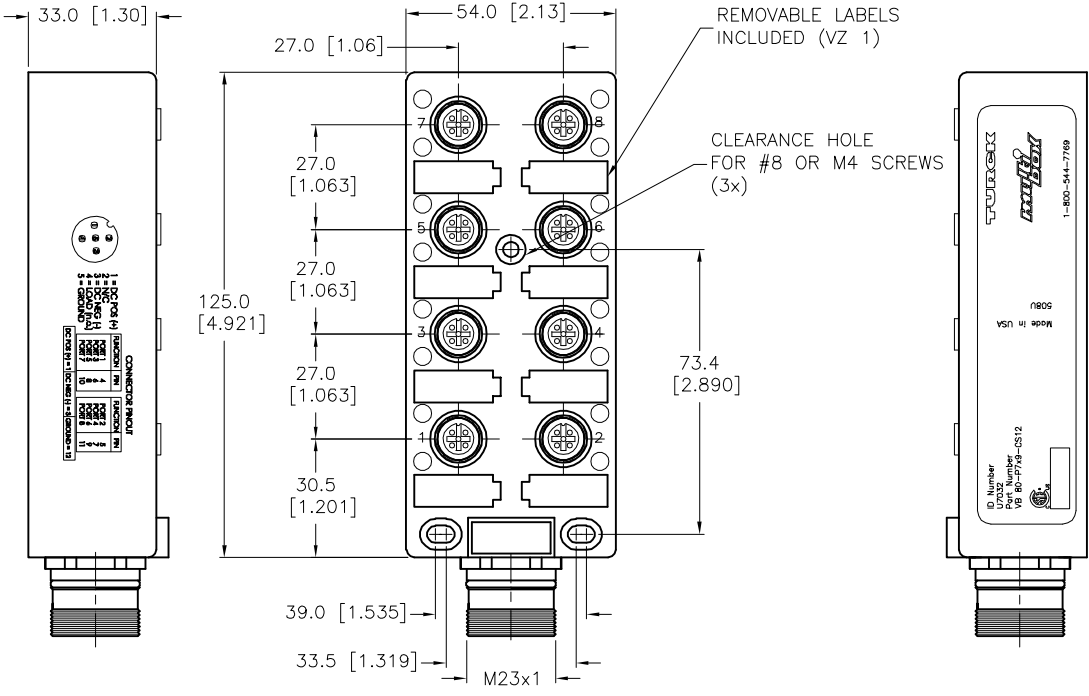

SOURCE DRAWING - FOR REFERENCE ONLY

NOTES:
1. USE MATING CORDSET CK 12-11-*(SOLD SEPARATELY).



CLOSURE CAPS
2 (INCLUDED)

RELATED DOCUMENTS 1. 2. 3. 4.	3RD ANGLE PROJECTION 	THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us	
		DRFT	RJP	DATE	12/08/94
MATERIAL SEE SPECIFICATIONS	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY	APVD		SCALE	1=2.0
FINISH SEE SPECIFICATIONS		CONTACT TURCK FOR MORE INFORMATION	UNIT OF MEASUREMENT MILLIMETER [INCH]		
DO NOT SCALE THIS DRAWING			REV K		
K UPDATED CLOSURE CAPS		TV	09/16/15	48811	FILE: U7032
REV	DESCRIPTION	BY	DATE	ECO NO.	SHEET 1 OF 1